



HRB-16A Rebar Bender (10-16mm)

Portable rebar bender



■ Product Features

High-power 1100W carbon brush motor Lightning quick bending - under 2.5 seconds Industrial strength machine head Lightweight, portable, low consumption Bending efficiency up 30% Bigger oil storage of cylinder



PROSHARP	PRODUCT INFO		
Model	HRB-16A	Bending speed	2-2.5 S
Туре	Rebar Bender	Maximum. Rebar	16 mm/0.63 inch
Color	Red, Blue	Minimal. Rebar	10 mm/0.394 inch
Power	1100W	Handle length	Pull back 14 CM
Voltage	220V/110V, custom accept	Rebar material type	Low carbon steel, round steel, thread steel

PRODU	JCT SIZE	PACK	AGE SIZE
Length(mm)	630	Length	670
Width(mm	150	Width	200
Height(mm)	155	Height(mm)	255
Weight(kg)	13.8	Weight(kg)	17.5



HRB-16B Rebar Bender (10-16mm)

Portable rebar bender



■ Product Features

High-power 1100W carbon brush motor Lightning quick bending - under 2.5 seconds Industrial strength machine head Lightweight, portable, low consumption Bending efficiency up 30% Bigger oil storage of cylinder



PROSHARP	PRODUCT INFO		
Model	HRB-16B	Bending speed	2-2.5 S
Туре	Rebar Bender	Maximum. Rebar	16 mm/0.63 inch
Color	Red, Blue	Minimal. Rebar	10 mm/0.394 inch
Power	1100W	Handle length	Pull up 19 CM
Voltage	220V/110V, custom accept	Rebar material type	Low carbon steel, round steel, thread steel

PRODU	JCT SIZE	PACK	AGE SIZE
Length(mm)	545	Length	600
Width(mm	200	Width	210
Height(mm)	150	Height(mm)	290
Weight(kg)	13.8	Weight(kg)	19



HRB-22 Rebar Bender (16-22mm)

Portable rebar bender



■ Product Features

High-power 1150W carbon brush motor Lightning quick bending - under 3 seconds Industrial strength machine head Lightweight, portable, low consumption Bending efficiency up 30% Bigger oil storage of cylinder



PROSHARP	PRODUCT INFO		
Model	HRB-22	Bending speed	2.5-3 S
Туре	Rebar Bender	Maximum. Rebar	22 mm/0.867 inch
Color	Red, Blue	Minimal. Rebar	16 mm/0.63 inch
Power	1150W	Handle length	Pull back 14 CM
Voltage	220V/110V, custom accept	Rebar material type	Low carbon steel, round steel, thread steel

PRODI	JCT SIZE	PACK	AGE SIZE
Length(mm)	640	Length	670
Width(mm	185	Width	200
Height(mm)	175	Height(mm)	255
Weight(kg)	14.8	Weight(kg)	19.5



HRB-25 Rebar Bender (16-25mm)

Portable rebar bender



■ Product Features

High-power 1200W carbon brush motor Lightning quick bending - under 5 seconds Industrial strength machine head Lightweight, portable, low consumption Bending efficiency up 30% Bigger oil storage of cylinder



PROSHARP	PRODUCT INFO		
Model	HRB-25	Bending speed	4-5 S
Туре	Rebar Bender	Maximum. Rebar	25mm/0.985 inch
Color	Red, Blue	Minimal. Rebar	16 mm/0.63 inch
Power	1200W	Handle length	Pull back 19 CM
Voltage	220V/110V, custom accept	Rebar material type	Low carbon steel, round steel, thread steel

PRODUCT SIZE		PACKAGE SIZE	
Length(mm)	675	Length	720
Width(mm	185	Width	220
Height(mm)	190	Height(mm)	240
Weight(kg)	18	Weight(kg)	24



HRB-28 Rebar Bender (20-28mm)

Portable rebar bender



■ Product Features

High-power 1250W carbon brush motor Lightning quick bending - under 5 seconds Industrial strength machine head Lightweight, portable, low consumption Bending efficiency up 30% Bigger oil storage of cylinder

PROSHARP	PRODUCT INFO		
Model	HRB-28	Bending speed	4-5 S
Туре	Rebar Bender	Maximum. Rebar	28mm/1.103 inch
Color	Red, Blue	Minimal. Rebar	20mm/0.787 inch
Power	1250W	Handle length	Pull back 21 CM
Voltage	220V/110V, custom accept	Rebar material type	Low carbon steel, round steel, thread steel

PRODU	CT SIZE	PACK	AGE SIZE
Length(mm)	720	Length	800
Width(mm	180	Width	300
Height(mm)	195	Height(mm)	215
Weight(kg)	22	Weight(kg)	32



HRB-32 Rebar Bender (22-32mm)

Portable rebar bender




■ Product Features

High-power 1600W carbon brush motor Lightning quick bending - under 6 seconds Industrial strength machine head Lightweight, portable, low consumption Bending efficiency up 30% Bigger oil storage of cylinder

PROSHARP	PRODUCT INFO		
Model	HRB-32	Bending speed	5-6S
Туре	Rebar Bender	Maximum. Rebar	32 mm/1.26 inch
Color	Red, Blue	Minimal. Rebar	22 mm/0.866 inch
Power	1600W	Handle length	Pull up 20 CM
Voltage	220V/110V, custom accept	Rebar material type	Low carbon steel, round steel, thread steel

PRODL	JCT SIZE	PACK	AGE SIZE
Length(mm)	640	Length	800
Width(mm	190	Width	215
Height(mm)	230	Height(mm)	300
Weight(kg)	23	Weight(kg)	33

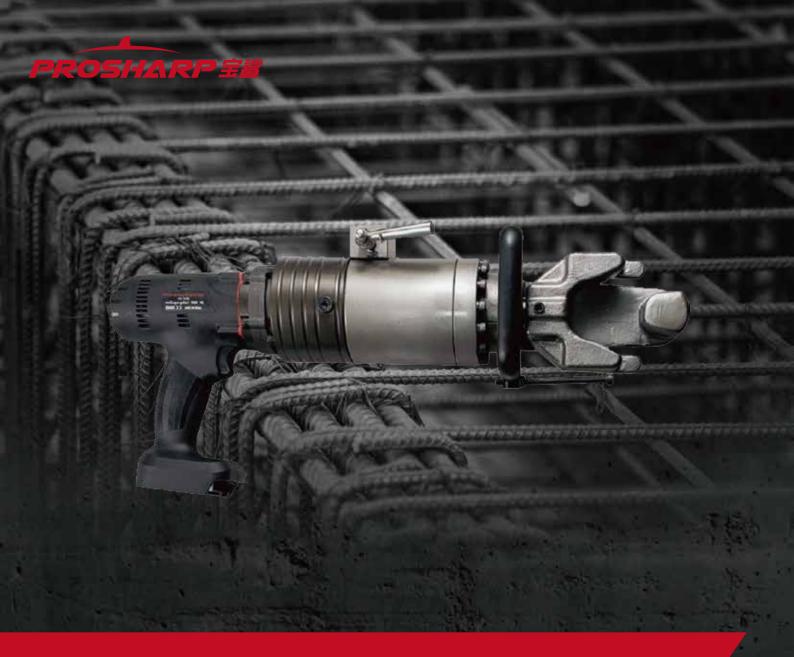

Cordless Rebar Bender

Electric, Battery Powered

- For construction sites, power engineering & fire fighting
- Lightweight, small size
- Special for high-altitude operations
- No sparks, no dust, safe & reliable



BRB-16 Electric Rebar Bender (10-16mm)

Cordless rebar bender



■ Product Features

Cordless, special for high-altitude operations High-power 400W brushless motor Lightning quick bend - under 4.5 seconds Bending efficiency up 30% Lightweight, portable, low consumption

PROSHARP		PRODUCT INFO	
Model	BRB-16	Bending speed	4-4.5 S
Туре	Rebar Bender	Bending range	10-16mm
Color	Silver gray	Battery capacity	5000mA
Power	400W	Battery charging time	90 min
Voltage	18V 5Ah	Battery charger input	AC110-240V 50-60Hz

PRODUCT SIZE		PACKAGE SIZE	
Length(mm)	300	Length	400
Width(mm	535	Width	560
Height(mm)	130	Height(mm)	155
Weight(kg)	14	Weight(kg)	20



Rebar Bender Machine

- Superior quality & performance
- Robust, wear-resistant, reliable
- Accurate angle setting
- Lightning quick bending under 4 seconds



RB-16 Bar Bender Machine

Rebar Bender Machine



■ Product Features

850/900W no-Load power 0-180° bending angle Foot switch easy operating Multi-angle forming, high efficiency Lightning quick bending - under 4 seconds

PROSHARP	PRODUCT INFO			
Model	RB-16	Certificate	CE ROHS ECM	
Voltage	220V/110V	Net weight	25kg	
No-load power	850W/900W	Gross weight	35kg	
Bending angle	0-180°	Dimensions	400×370×230mm	
Bending range	6-16mm	Package dimensions	600×400×300mm	
Bending speed	3.5-4s	Package	Outer tin box packaging	



RB-25A Bar Bender Machine

Rebar Bender Machine



■ Product Features

1600W no-Load power 0-180° bending single angle Foot switch easy operating Multi-angle forming, high efficiency Lightning quick bending - under 4 seconds

PROSHARP Model	PRODUCT INFO		
	RB-25A	Certificate	CE ROHS ECM
Voltage	220V/110V	Net weight	78kg
No-load power	1600W	Gross weight	96kg
Bending angle	0-180°(Single angle)	Dimensions	440×430×430mm
Bending range	6-25mm	Package dimensions	500×555×505mm
Bending speed	3.5-4s	Package	Outer tin box packaging



RB-25B Bar Bender Machine

Rebar Bender Machine



■ Product Features

1600/1700W no-Load power 0-180° bending double angle Foot switch easy operating Multi-angle forming, high efficiency Lightning quick bending - under 4 seconds

PROSHARP Model	PRODUCT INFO		
	RB-25B	Certificate	CE ROHS ECM
Voltage	220V/110V	Net weight	79kg
No-load power	1600W/1700W	Gross weight	97kg
Bending angle	0-180°(Double angle)	Dimensions	440×430×430mm
Bending range	6-25mm	Package dimensions	500×555×505mm
Bending speed	3.5-4s	Package	Outer tin box packaging





- Portable Rebar Cutter
- Portable Rebar Bender
- Rebar Straightening Machine
- Hydraulic Punching Machine
- Cold Cut Saw

Always provide fast technical support and spare parts service within 24 hours, PROSHARP is very grateful for your business and feedback from all over the world. PROSHARP always goes hand in hand with our partners.

PROSHARP TOOL

Wen Zhou Opticar Lighting Co., Ltd.

Tel: +86-577-63786911 Mobile: +86 13915033441

WhatsApp: +86 139 1503 3441 Email: info@prosharptool.com

Add.: No.18-6, Mingshan Road, Kunyang Town,

Pingyang County, Wenzhou City, Zhejiang Province, China

Website: www.prosharptool.com